

\*ภาพใช้เพื่อการโฆษณาเท่านั้น



2023 MODEL YEAR


# KLR 650

Non ABS

**NOW TOUGHER, MORE RELIABLE,  
MORE COMFORTABLE**



## GO-FARTHER ADVENTURE PARTNER

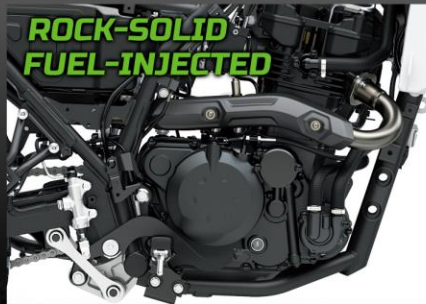

**ROCK-SOLID  
FUEL-INJECTED**



**TOUGH SEMI-DOUBLE  
CRADLE FRAME**



**STURDY SUSPENSION**

**652 CC  
DISPLACEMENT**

**209 KG.  
CURB MASS**

**221 KG.  
CURB MASS  
(ADVENTURE Model)**

**23 LITRES  
FUEL**

ADVENTURE Model



**5 SPEED  
TRANSMISSION**

**4 STROKE  
ENGINE**

**4 VALVES  
VALVE**

### SPECIFICATION

Ignition system	Transistorised
Fuel system	Fuel injection (ø40 x 1)
Starting system	Electric
Clutch	Wet multi-disc, manual
Tire front	90/90-21M/C 54S
Tire rear	130/80-17M/C 65S

Length x Width x Height *	2,280 mm x 970 mm x 1,465 mm / 1,430 mm ( 2,280 mm x 970 mm x 1,455 mm / 1,420 mm ADVENTURE Model )
Wheelbase	1,540 mm
Ground clearance	210 mm
Seat height	840 mm
Bore and stroke	100.0 x 83.0 mm
Compression ratio	9.8:1